
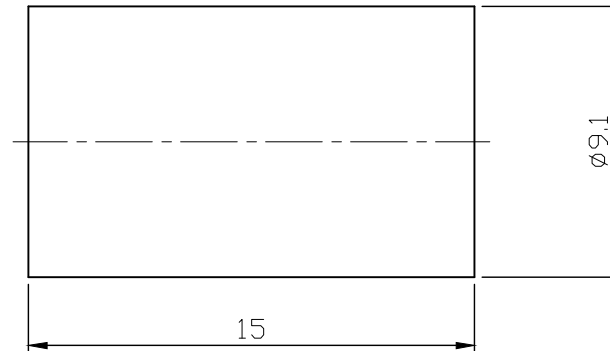
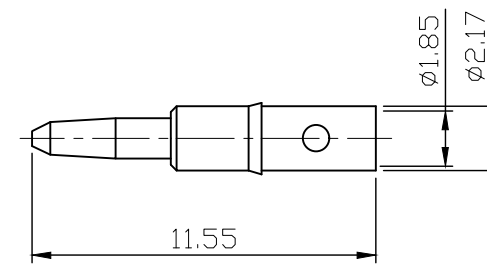


REVISION

ASS. REV.	CON. REV.	DESCRIPTION	DATE	APPROVED
T	T	INITIAL RELEASE	2020/09/02	

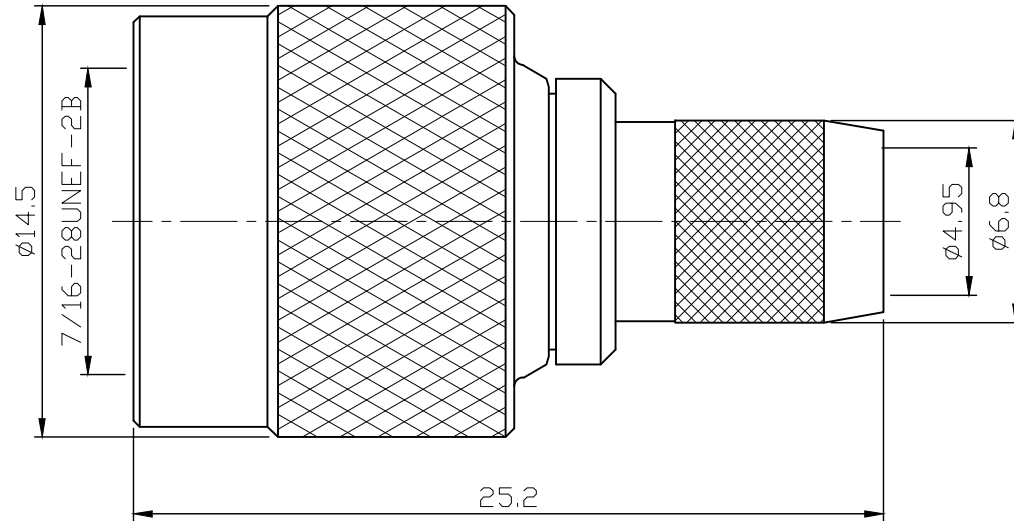

VSWR 1.2 : 1 UP TO 6GHz

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS.
2. TIN-ZINC-COPPER-ALLOY PL. 100 MIN. OVER COPPER PL. 50 MIN.
3. GOLD PL. 4 MIN. OVER NICKEL-PHOSPHORUS ALLOY PL. 80 MIN. OVER COPPER PL. 20 MIN.

※注意滾包零件1時不可太緊或往後掉出,要能順暢旋轉即可!!

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	PART NO.	REV	DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (UNIT: MM)	SCALE 4 / 1	ASSEMBLY REV. T	CONNECTOR REV. T	UNIT MM	JYE BAO CO., LTD. TAIPEI TAIWAN	
6	FERRULE	COPPER	NOTE 2	1	N3100-5DFB-8/W	B	0~0.5 = ±0.03	APPROVED		DATE		TITLE TNC PLUG CRIMP	
5	GASKET	SILICONE		1	TNC3100-0213-5	B	0.5~5 = ±0.05	CHECKED		DATE			
4	CONTACT PIN	NOTE 1	NOTE 3	1	TNC31-L300-CR-4/NM	T	5~10 = ±0.07	TESTER		DATE		DRAWING NO. TNC3100-L300/CR	
3	INSULATOR	TEFLON		1	AD-B3M8-4	A	10~20 = ±0.10	DATE		DATE			
2	BODY	NOTE 1	NOTE 2	1	TNC31-L300-CR-2/W	T	20~30 = ±0.15	DRAWING		DATE			
1	SHELL	NOTE 1	NOTE 2	1	TNC3300-1/W	-	30~ = ±0.20						
							ANGLE ±5°						