

Rubber Antenna with Universal FME-Connection System  
for Portable Equipment in the 2 m Band

DESCRIPTION

- Sturdy, conical, flexible rubber antenna
- Full size ¼ λ whip.
- Highest quality materials – designed for “wear and tear”.
- Delivered factory tuned and tested to ensure minimum SWR and optimum performance.
- Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- Designed for use with the following of Procoms line of black FME-connectors (to be ordered separately): BFME-UHF, BFME-BNC, BFME-TNC, BFME-N, BFME-EBNC and BFME-ETNC.




ORDERING

| Type       | Product No. | Frequency     |
|------------|-------------|---------------|
| GA 2/l-FME | 140000120   | 144 - 164 MHz |
| GA 2/h-FME | 140000116   | 155 - 175 MHz |

ADDITIONAL DATA

RECOMMENDED BFME-CONNECTORS

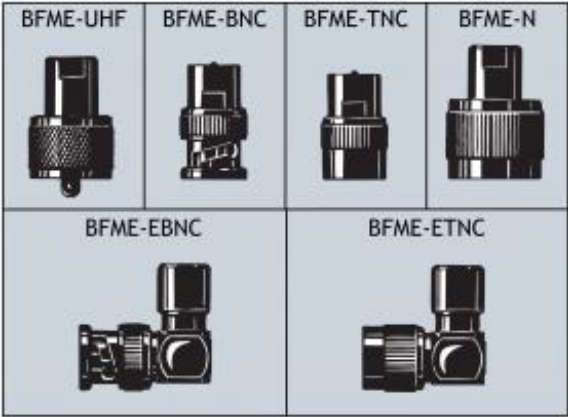

(To be ordered separately)

SPECIFICATIONS

| Electrical          |                                                                    |
|---------------------|--------------------------------------------------------------------|
| Model               | GA 2/...-FME                                                       |
| Frequency           | 2 m band covered by two models                                     |
| Antenna Type        | Antenna for portable equipment                                     |
| Polarisation        | Vertical                                                           |
| Impedance           | 50 Ω                                                               |
| Gain                | 0 dB (compared to a ¼ λ portable antenna)                          |
| VSWR                | < 2.0:1 when mounted directly on portable equipment                |
| Maximum Input Power | 100 W                                                              |
| Mechanical          |                                                                    |
| Connection(s)       | FME female (Exchangeable BFME-connectors to be ordered separately) |
| Materials           | Steelwire moulded in thermoplastic rubber<br>Black-chromed brass   |
| Colour              | Black                                                              |
| Height              | 450 mm / 17.72 in.                                                 |
| Weight              | 0.06 kg / 0.13 lb                                                  |

PLEASE NOTE

The GA 2 is also available with SMA male connector and different thread studs, but in this case with fixed, non-exchangeable connector (not FMEconnection system). Information on these special versions on request.

